



## HOW TO MAINTAIN FOUNTAINS:

Thank you for your purchase of a Giannini Garden Ornaments Fountain! In this care sheet you will find important information about installing and maintaining your fountain. Giannini products are made with the upmost care and best materials possible. With proper care and maintenance, your fountain will last for years and generations to come.

### BASIC INFO:

- ~ Place fountains on a flat, solid base. Examples include: a concrete foundation, compacted gravel, or paver stones. Fountains need to be on a level surface to operate correctly.
- ~ Fountains with a large one-piece pond basin, (48" diameter and up) the basin must be placed on a soft surface like sand or gravel (not dirt). If a pond basin is to be installed on a hard surface like concrete or pavers, a 1"-2" layer of sand must be applied over the surface. The sand will help with leveling by allowing the basin to settle and be completely supported, reducing the risk of possible stress cracks due to uneven support. Sand can be grouted after installation to prevent and run-off.
- ~ Fountains do not require a permanent water line as Giannini fountains come with recirculating pumps. Fountains can be filled using a hose, bucket, etc. when needed.
- ~ You need to have electrical outlet in close range to the location of the fountain. Giannini pumps have a three prong plug and the cord length is usually 12 ft long, so the outlet needs to be fairly close. Fountain pumps should only be plugged into a GFCI protected, outdoor outlet.
- ~ Water level must be full to the rim AT ALL TIMES (not doing so will cause the concrete to shock and crack). Giannini is not responsible for cracked items after delivery or pick up.
- ~ During the winter months, protect your fountain from harsh or freezing weather by draining the fountain and covering it with a weather proof tarp, or dismantle fountain and store indoors. This will protect your fountain from cracking and/or severe damage. REMOVE WATER FROM FOUNTAIN DURING PROLONGED FREEZES. FREEZE DAMAGE WILL VOID YOUR GIANNINI WARRANTY.
- ~ Never fill a bowl with water when it is hot to the touch (doing so will shock the concrete and crack). Fill the bowl in the early morning or at night when it is cool out.
- ~ Keep the water pump clear of leaves and debris so that it does not get clogged
  - \*Clean pump filter at least once a month, depending on the area the fountain is. In heavily wooded areas, the pump needs to be checked and cleaned more often.
- ~ If the fountain develops algae or build up, drain the water from the fountain and scrub off with a brush or soft carwash sponge. Try not to scrub too hard or vigorously. Doing so may cause the stain to come off. Rinse after algae is scrubbed off.
  - \*To prevent algae build up, use an algae reducer solution, such as **Fountec** or **CrystalClear-Sparkle**, to reduce any build up. Do not use Chlorine or any other pool chemicals! Chlorine and most pool chemicals will damage the fountain and pump.
- ~ Hard water should be filtered before filling your fountain: you can use a hose-attached prefilter, such as the **PreFresh Spa & Pool Water Fill Filter**, available online or at a local swimming pool supply store. In areas with severe hard water, only distilled water should be used to fill your fountains. Filtering the water will not remove all mineral content in hard water, lime scale and white residue can still appear on your fountain, which should be removed immediately.
- ~ Any white residue (white scale, lime scale, calcium buildup, or efflorescence) that builds up on the fountain **should be removed immediately.** This buildup is normal and unavoidable in areas with a high mineral content (hard water) in the local water supply. The best way to remove any white residue would be to gently scrub a mixture of **Protec** or (**CrystalClear-SubLime**) and water along the surface of the fountain. A mixture of 3 parts white vinegar and 1 part water will also work and removing any white residue. Failure to remove any white residue will stain and/or damage the fountain. Adding **Protec** or **SubLime** to the fountain's water will help in softening the hard water, regular use in accordance to the instructions is EXCESSIVE WEIGHT OR PRESSURE ON FOUNTAINS AND/OR STATUARY MAY CAUSE THEM TO FALL. KEEP CHILDREN AND OTHERS FROM CLIMBING, SITTING OR LEANING ON YOUR FOUNTAIN AND/OR STATUARY ITEMS. ALL GIANNINI WALL FOUNTAINS HAVE AN ATTACHMENT POINT BEHIND THE TOP HALF OF THE WALL FOUNTAIN. ALL WALL FOUNTAIN TOPS MUST BE SECURED TO WALL, FENCE, etc. FOR STABILITY. SIGNATURE MEANS FULL UNDERSTANDING AND RELEASE OF LIABILITY FOR GIANNINI GARDEN ORNAMENTS:recommended. Giannini Garden Ornament's warranty does not cover damage due to white scale, lime scale, calcium buildup, efflorescence, or freeze damage. Please thoroughly review this care sheet for more information.
- ~ Most fountains have no interlocking component parts. The component parts are held together by gravity only. Gluing or cementing the component parts together is not recommended. The parts may need to be dismantled to replace the pump, hardware, or to move the fountain to another location.

### CAUTION:

- ~ EXCESSIVE WEIGHT OR PRESSURE ON FOUNTAINS AND/OR STATUARY MAY CAUSE THEM TO FALL. KEEP CHILDREN AND OTHERS FROM CLIMBING, SITTING OR LEANING ON YOUR FOUNTAIN AND/OR STATUARY ITEMS. ALL GIANNINI WALL FOUNTAINS HAVE AN ATTACHMENT POINT BEHIND THE TOP HALF OF THE WALL FOUNTAIN. **ALL WALL FOUNTAIN TOPS MUST BE SECURED TO WALL, FENCE, etc. FOR STABILITY**



**Step 5**

Steel Bar (on back of ftn) used for securing fountain to wall, fence, or post. Steel wire recommended for securing

**Step 3**

Slide power cord through rubber stopper and secure rubber stopper in the 2" PVC coupling. Check for tight fit to avoid leaks.

**Step 4**

Clear Vinyl Tubing. Secure to copper connection

G-280 Pump w/ water-flow adjustment knob.

**Step 2**

110V 3 prong power cord. Plug into 110v GFCI outdoor outlet. Turn blue knob to adjust water flow.



**Step 1**

Hard Surface such as a concrete pad, compacted pea gravel, paver stones, or bricks

**CAUTION:**



~ Excessive weight or pressure on the fountain may cause it to fall. KEEP CHILDREN AND OTHERS FROM CLIMBING, SITTING OR LEANING ON THE FOUNTAIN AND ITS COMPONENTS.

See Back for Fountain Care Instructions

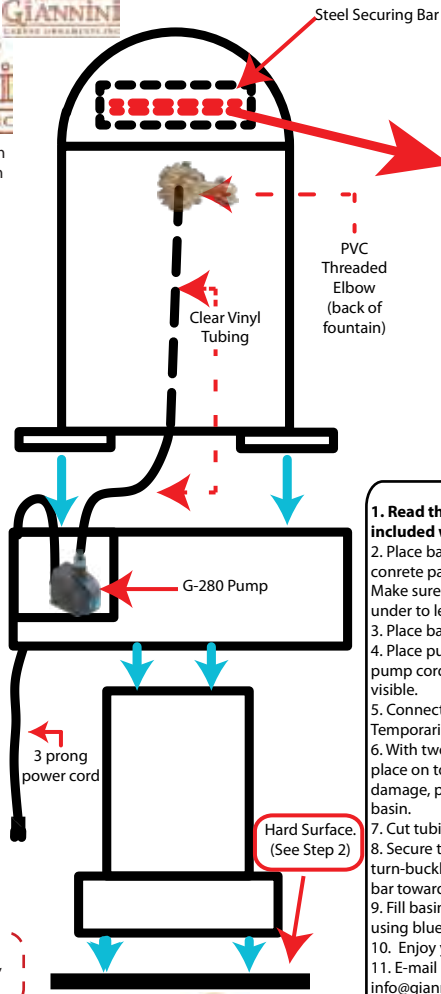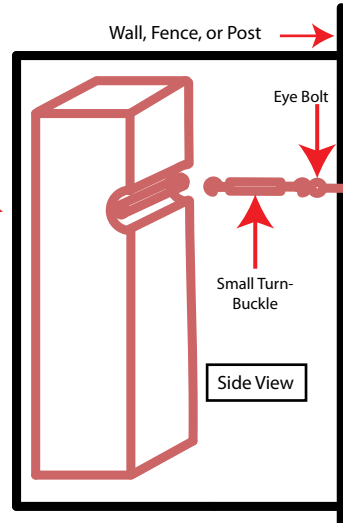

**Installation Instructions:**

1. Read the "How to Maintain Fountains" instruction sheet included with your shipment. (On reverse side)
2. Place base of fountain on a hard or solid surface, such as a concrete pad, pavers stones, bricks, or compacted pea gravel. Make sure base is level with the ground. If not level, place a shim under to level
3. Place basin on top of base and center.
4. Place pump in left compartment towards rear of basin. Drape pump cord over basin and run along back of base so it is not visible.
5. Connected clear vinyl tubing to nozzle on pump and secure. Temporarily drape tubing over back of bowl.
6. With two or more people, lift top component of fountain and place on top of basin as shown. To ensure that there is no damage, place burlap (used for packaging) around edges of basin.
7. Cut tubing to length and attach to PVC elbow on back of ftn.
8. Secure top of fountain to a wall, post, or fence using supplied turn-buckle and eyebolt. Turn buckle should attach to the steel bar towards the top and back of fountain.
9. Fill basin full of water and plug in pump. Adjust water flow using blue dial on front of the pump.
10. Enjoy your new Giannini fountain!
11. E-mail a picture of your installed fountain to info@gianninigarden.com for a 10% off coupon on a future purchase.

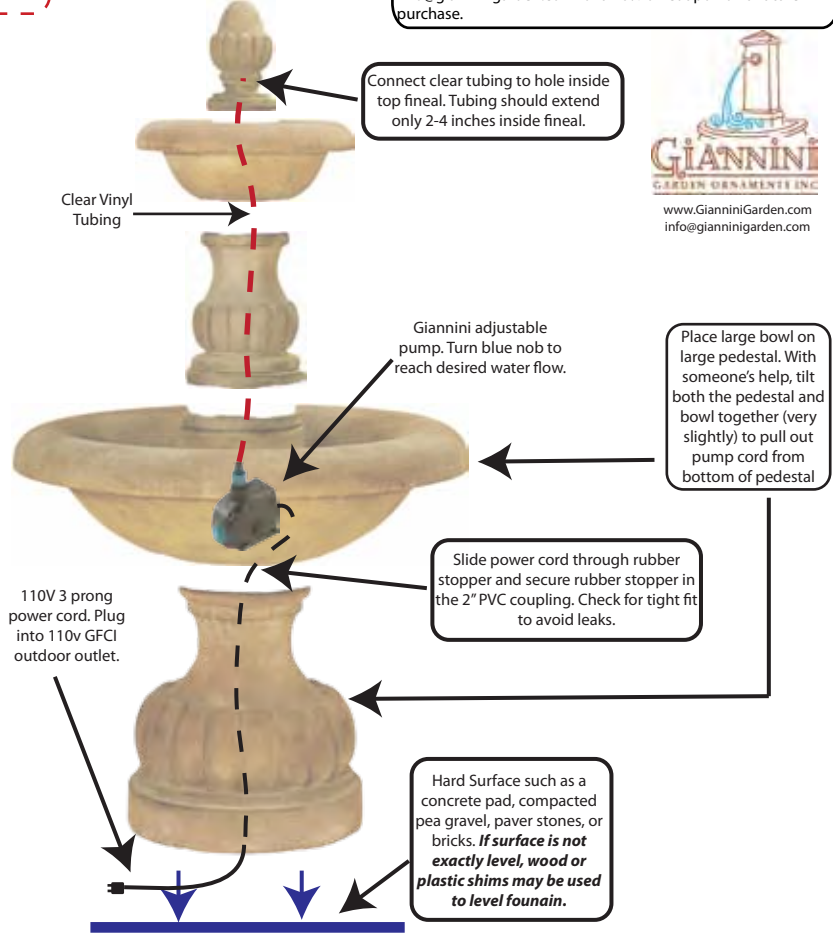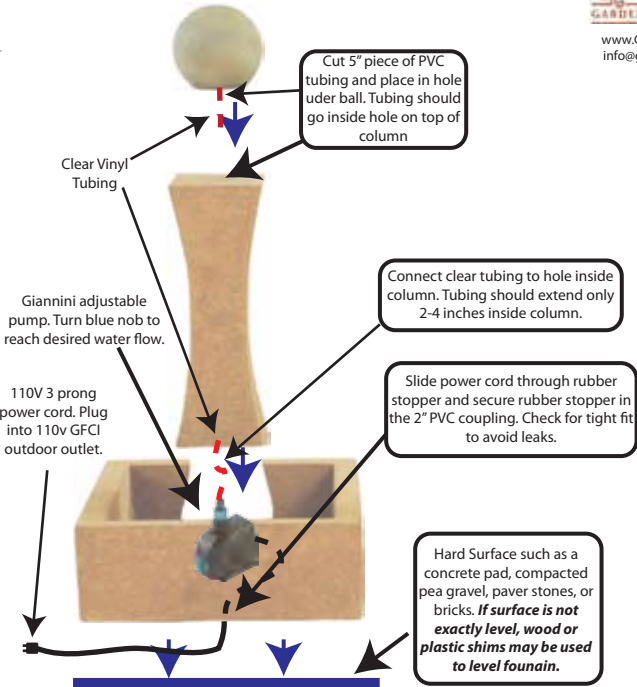

**CAUTION:**

~ Excessive weight or pressure on the fountain may cause it to fall. KEEP CHILDREN AND OTHERS FROM CLIMBING, SITTING OR LEANING ON THE FOUNTAIN AND ITS COMPONENTS.

**CAUTION:**

~ Excessive weight or pressure on the fountain may cause it to fall. KEEP CHILDREN AND OTHERS FROM CLIMBING, SITTING OR LEANING ON THE FOUNTAIN AND ITS COMPONENTS.



www.GianniniGarden.com  
info@gianninigarden.com

Clear Vinyl Tubing. Run throughout the center of fountain.


1/2" Barb x Barb x Barb Tee. Connect vinyl tubing as shown

Secure 2" PVC Pipe (5-6" in Length) into PVC Coupling. This PVC pipe stops water from draining into pond when Fountain is off.

Slide power cord through rubber stopper and secure rubber stopper in the 2" PVC coupling. Check for tight fit to avoid leaks.

Pump with 110V 3 prong power cord. Plug into 110v GFCI outdoor outlet. Turn blue knob to adjust water


All pond basins must be placed on a soft surface of compacted sand, gravel or base-rock. If the pond basin must be placed on a hard surface such as concrete or pavers, a 1" to 2" layer of sand must be applied over the hard surface

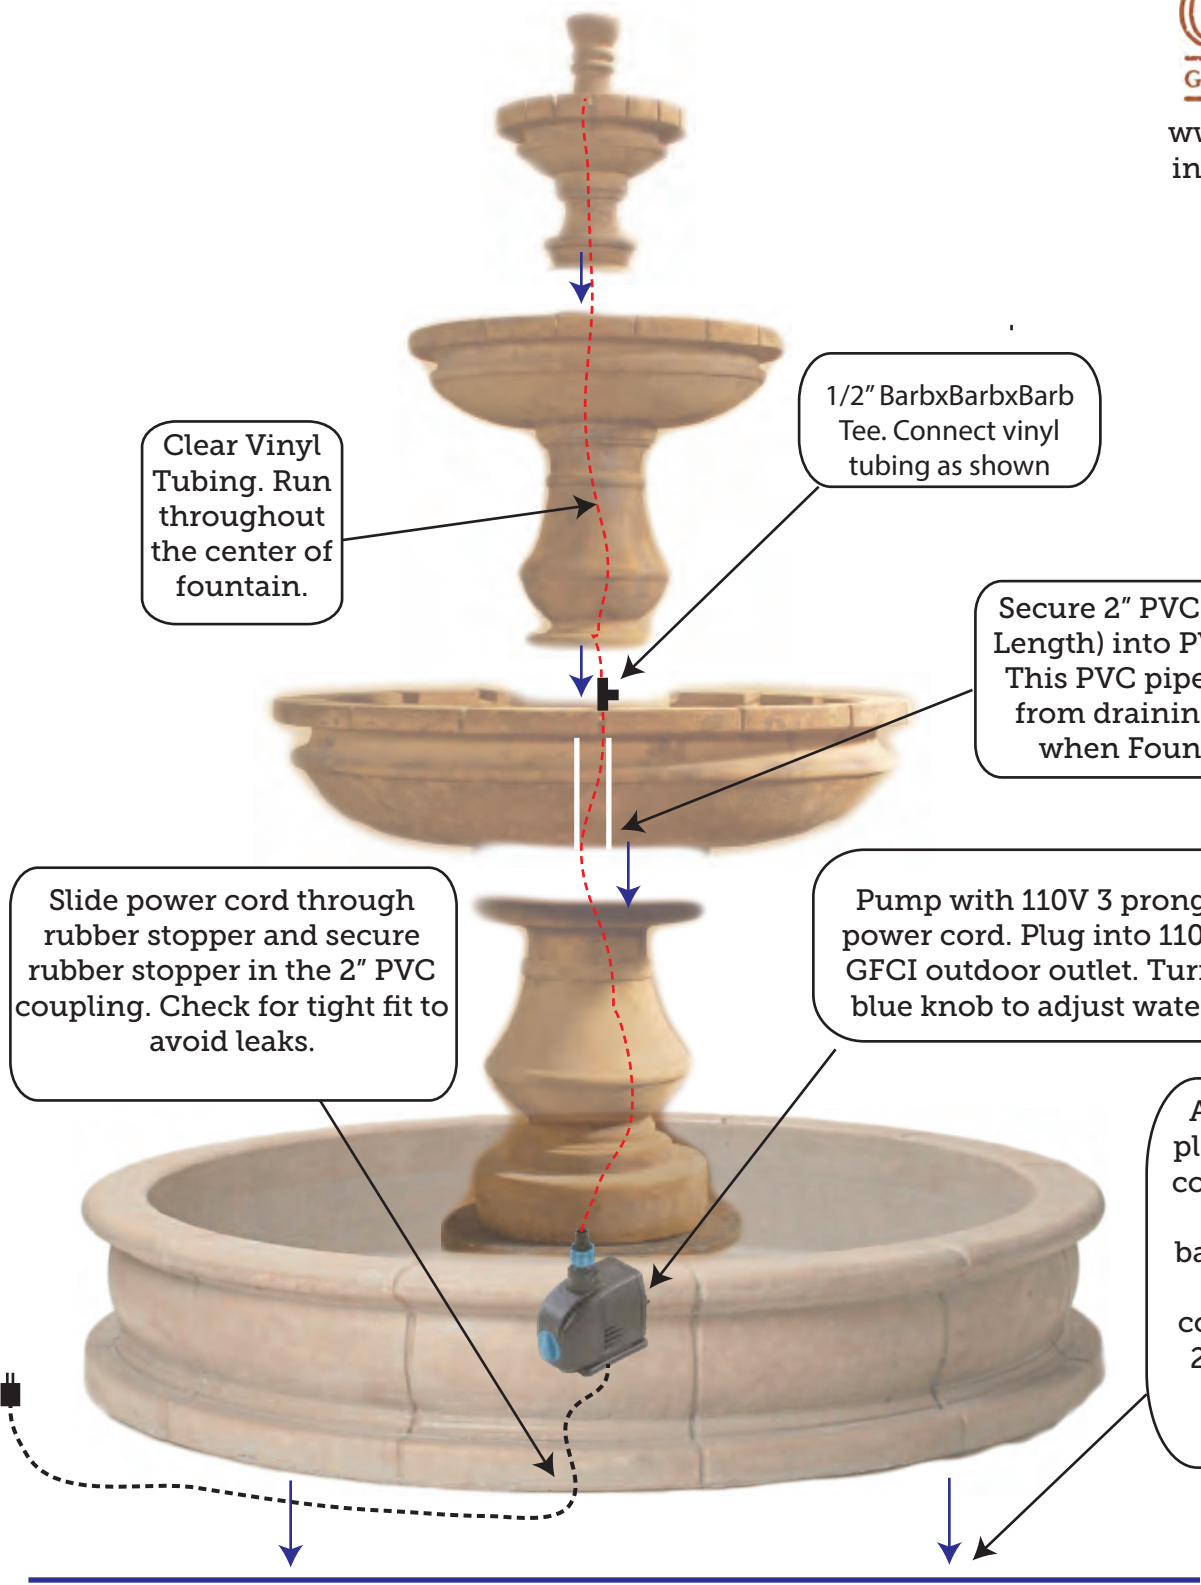

**CAUTION:**  
~ Excessive weight or pressure on the fountain may cause it to fall. KEEP CHILDREN AND OTHERS FROM CLIMBING, SITTING OR LEANING ON THE FOUNTAIN AND ITS COMPONENTS.

**Pad Diagram for all Giannini One Piece Round Ponds & Easy Ponds, including the following sizes:**

**84", 82", 80", 71", 70", 66", 61" 58", 54", 51", 48", 37"**

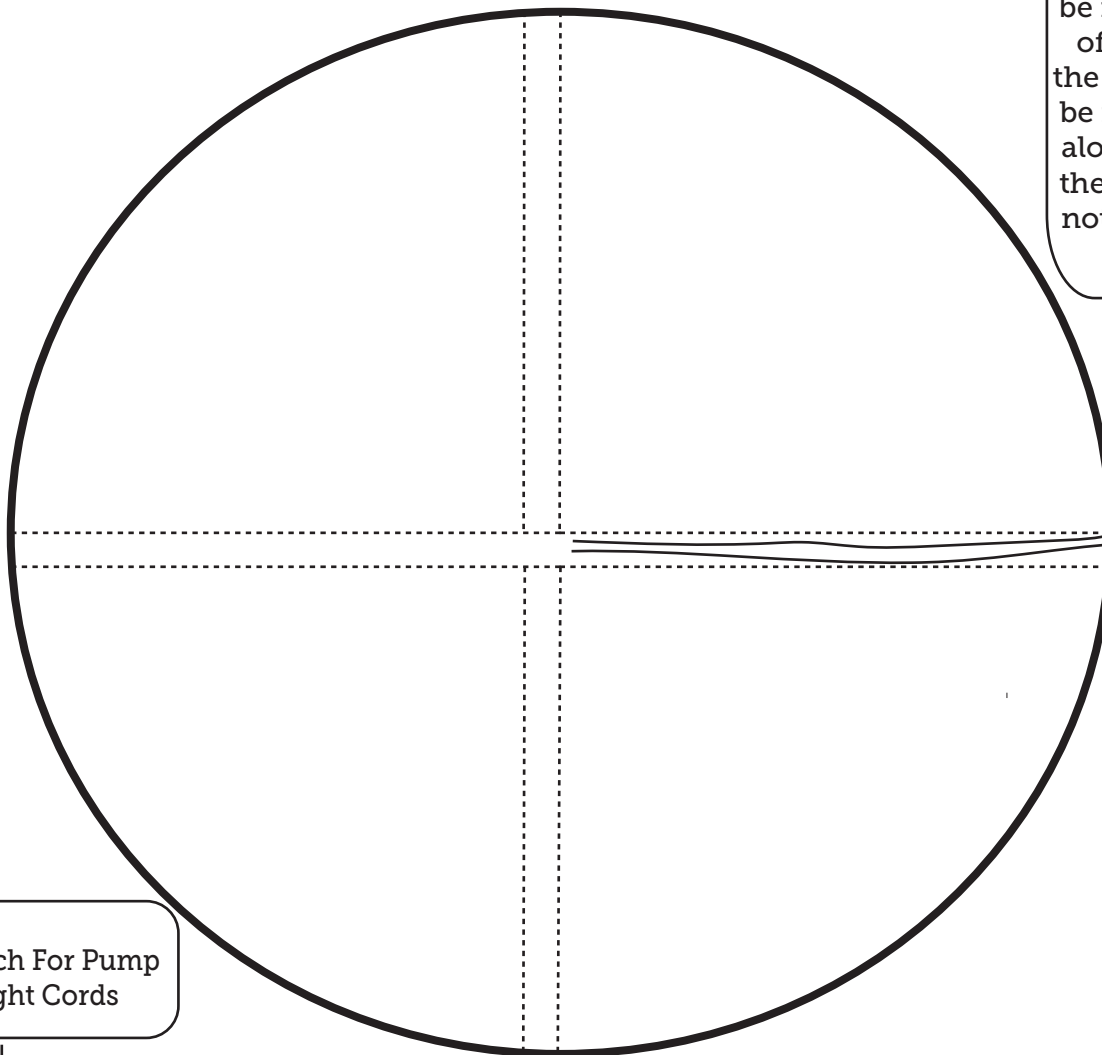

GFCI Duplex outlet with waterproof receptable box should be installed within 20' of the outer edge of the pond pad. Can also be installed anywhere along the pad edge as the pond has multiple notches for the pump and light cords.


Pump and submersible light wires come out from under the pond and above the pad. Pond includes a notch on the bottom for the cords.

----- = Notch For Pump & Light Cords

Various widths, depending on pond.  
Reference invoice or quote for pond size.  
Pad to be 4"-5" thick.

**All pond basins must be placed on a soft surface of compacted sand, gravel or base-rock. If the pond basin must be placed on a hard surface such as concrete or pavers, a 1" to 2" layer of sand must be applied over the hard surface**

**VERY IMPORTANT IF INSTALLING ON A CONCRETE PAD: Concrete pad must be completely flat and level.**

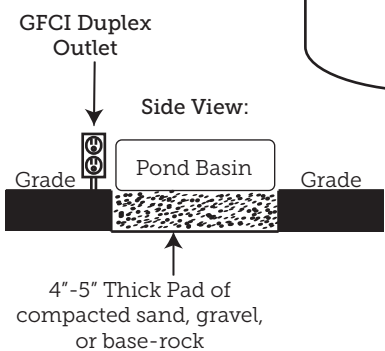

**GIANNINI**  
GARDEN ORNAMENTS INC  
www.GianniniGarden.com  
info@gianninigarden.com

# Giannini Garden Flame Collection



## DANGER

IF YOU SMELL GAS:

- Shut off gas to the appliance immediately
- Extinguish any open flame
- If odor continues, keep away from the appliance and immediately call your gas supplier or fire department



## WARNING

- HOT! DO NOT TOUCH. SEVERE BURNS MAY RESULT
- CLOTHING IGNITION MAY RESULT
- Glass and other surfaces are hot during operation and cool-down.



## WARNING

For outdoor use only



## WARNING

FIRE PIT OR FIRE BOWL MUST BE INSTALLED BY A QUALIFIED TECHNICIAN WITH EXPERIENCE IN GAS AND ELECTRIC SERVICE. ALL GAS CONNECTIONS MUST BE CHECKED WITH COMMERCIAL LEAK-CHECKING EQUIPMENT.



## WARNING

Improper installation, adjustment, alteration, service, or maintenance can cause injury or property damage.

### CARBON MONOXIDE HAZARD!

This appliance can produce carbon monoxide. Using this appliance in an enclosed space can kill you! **Never use in an enclosed space such as campers, tents, cars, or inside your home.**



## WARNING

Do not burn solid fuels in this gas or propane appliance.



## WARNING

Do not store or use gasoline, or other flammable vapors and liquids, in the vicinity of the fire pit or any other source of flame.



## WARNING

Key valve & propane valve MUST be shut off when not in use. Key must be removed and stored in a safe place



## WARNING

**CHECK ENTIRE SYSTEM FOR LEAKS BEFORE OPERATING**

**DO NOT BURN WITHOUT GLASS OR OTHER SUBSTRATE IN BURNER.**



## WARNING

**Children must be supervised at all times when near the fire pit or fire bowl.** GLASS AND OTHER SURFACES ARE HOT DURING OPERATION AND COOL-DOWN



## WARNING

All vents must remain open and uncovered. Fire media such as glass and/or lava rock must not block airflow to and from vents.

